



AB05 LED

Primary Applications

Confined or restricted spaces, such as stairwells, storage areas and corridors requiring consistent light.

Luminaire Models

Model	Equivalent Light Output	Energy Savings
AB05	150W Incandescent	Up to 80%


Certifications & Compliances

- Zone 1, 2, 21, 22
- Ex d IIB T6
- II 2 G Ex d IIB T6/T5 Gb
- II 2 D Ex tb IIIC T80°C/T100°C Db
- Certificate BVS 09 ATEX E 014 X
- IP66

Electrical Ratings

Voltages: 120-240VAC
Input Power: 32W

Explosion-protected bulkhead light fitting provides energy efficiency, shock and vibration resistance and extremely long life

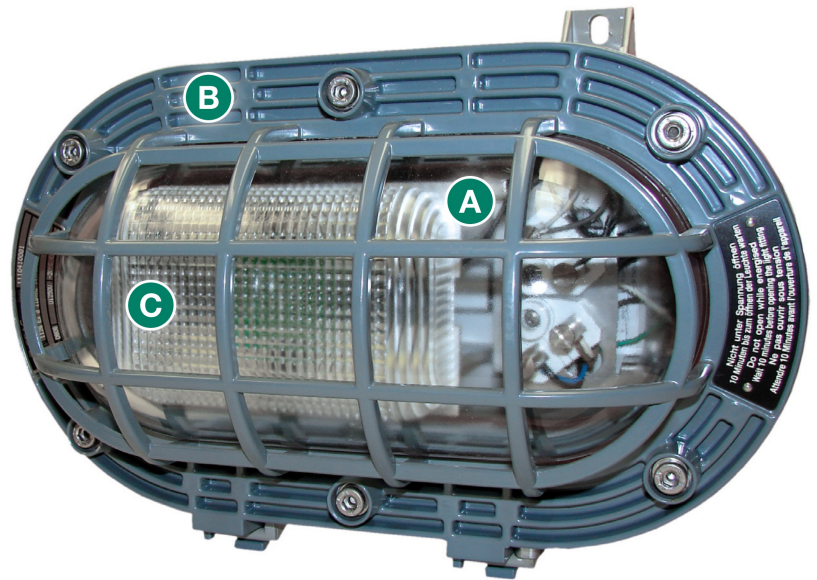

Design Features

- A Shock- and vibration-resistant** - Durable vibration-resistant LEDs decrease maintenance costs.
- B Lightweight enclosure** - Robust light alloy enclosure weighs only 7.0 kg, allowing the user to mount in areas where the available space is restricted, and making installation fast and easy.
- C Instant illumination and restrike** - Decreases facility downtime; no warm-up time required.